




HP Colorfast Adhesive Vinyl, 2 Pack



The HP Designjet printing system—the complete solution

HP Designjet printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

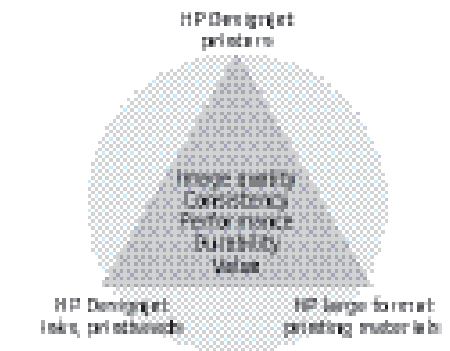

¹ With Original HP 771 Vivid Photo Inks, Original HP 91 Photo Inks, or Original HP 70 Photo Inks on the HP Designjet Z3200 Photo Printer series. Display permanence rating for interior displays/ away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. on a range of HP media. For more information, see globalBMG.com/hp/t/printpermanence.

² HP Colorfast Adhesive Vinyl can be easily removed. Residual adhesive can be easily wiped clean. Some warranty limitations apply, see the Limited Warranty statement at globalBMG.com/hp/t/printpermanence.

Produce stunning up-close image quality

See premium image quality on this premium vinyl

Gain all the benefits a premium vinyl has to offer. With a permanent, pressure-sensitive adhesive, this vinyl resists peeling.

Look to the vinyl that can make your job easier

Gain efficiency. ICC profiles help you get the color you need quickly. Instant dry time helps keep your workflow moving. This versatile material is compatible with both HP dye- and pigment-based inks.

Produce images with broad appeal

Print sharp, lifelike images ideal for up-close viewing. With a broad color gamut, this presentation-quality vinyl produces long-lasting, sharp image quality and vibrant color for a wide range of POP, retail, and event displays.

Target customers	Applications	Benefits
Advertising agencies	Indoor promotional and event signage	Sharp image quality ideal for viewing up close
Graphic artists	POP and retail displays	A broad color gamut for vibrant color
Sign shops	Trade show and event displays	Instant dry time
Print service providers		Permanent pressure-sensitive adhesive resists peeling
		75+ years, unlaminated indoor display permanence on HP Designjet Z-series printers ¹
		Versatile compatibility with both Original HP dye- and pigment-based inks
		Easy to remove, with a limited HP warranty ²

Technical specifications



HP Colorfast Adhesive Vinyl, 2 Pack

For the latest ICC/media profiles and a variety of resources to help you get the most out of your printer and HP large format printing materials, please visit globalBMG.com/hp/.

Weight (without liner)	190 g/m² per ISO 536 Test Method				
Weight (with liner)	345 g/m² per ISO 536 Test Method				
Thickness (without liner)	160 microns/6.3 mil per ISO 534 Test Method				
Thickness (with liner)	325 microns/12.8 mil per ISO 534 Test Method				
Opacity (with liner)	Greater than 95% per TAPPI T-425 Test Method, greater than 96% per ISO 2471 Test Method				
Brightness (with liner)	Greater than 90% per TAPPI T-452 Test Method, greater than 92% per ISO 2470 Test Method				
Whiteness (with liner)	112 per ISO 11476 Test Method, 130 per ISO 11475 Test Method				
Finish	Matte				
Operating temperature	15 to 35° C / 59 to 95° F				
Operating humidity	20 to 80% RH				
Display permanence (Indoor home or office)	75+ years, unlaminated with Original HP 771 Vivid Photo Inks, Original HP 91 Photo Inks, or Original HP 70 Photo Inks on the HP Designjet Z3200 Photo Printer series ³				
Water resistance	Moderately water resistant with Original HP 771 Vivid Photo Inks, Original HP 91 Photo Inks, or Original HP 70 Photo Inks on the HP Designjet Z3200 Photo Printer series ⁴				
Dry time	Less than 2 minutes (at 23° C, 50% RH)				
Lamination	Yes				
Shelf life	2 years, unopened in original packaging				
Storage temperature	15 to 35° C / 59 to 95° F				
Storage humidity	15 to 30% RH				
Country of origin	Product of China				
Ordering information	Product numbers	Quantity	Roll sizes	UPC codes	Region
	C0F08A	2 Pack	914 mm x 12,2 m (36 in x 40 ft)	848412012859	Worldwide
	C0F09A	2 Pack	1372 mm x 12,2 m (54 in x 40 ft)	848412012866	North America, Europe
Warranty	HP offers a range of self-adhesive materials with warranties that guarantee these products to be free of material or coating flaws and defects that affect the final use of the print and meet HP published specifications. For warranty statement please see globalBMG.com/hp/MediaWarranties .				

³ Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. on a range of HP media. For more information, see globalBMG.com/hp/t/printpermanence.

⁴ Water resistance testing by HP Image Permanence Lab on a range of HP media and follows ISO 18935 method. For more information, see: globalBMG.com/hp/t/printpermanence.

For detailed information on the HP large format printing materials portfolio and to order, see hp.com/go/LFPrintingMaterials

